


3 PIECE, HIGH STRENGTH ALLOY, HEAVY DUTY SHANK
MALE ROD ENDS ••• SELF LUBRICATING

RMX-T

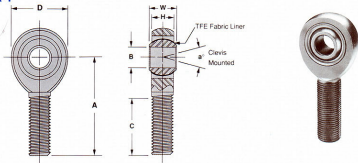

PART NO.		DIMENSIONS IN INCHES										Radial Static Load Cap. Lbs.	Approx. Brg. Wt. Lbs.
Right Hand	Left Hand	B + .0015 - .0005	W + .000 - .005	H ± .005	A ± .015	D ± .010	Ball Dia. Ref.	C + .062 - .031	Thread UNF-3A	a° Mounting Angle			
RMX3T	RMXL3T	1.900	.312	.250	1.562	.750	.437	1.000	1/4-28	10	5,260	.043	
RMX4T	RMXL4T	2.500	.375	.281	1.875	.875	.500	1.250	5/16-24	13	8,452	.072	
RMX5T	RMXL5T	.3125	.437	.344	1.938	1.000	.625	1.250	3/8-24	12	12,978	.112	
RMX6T	RMXL6T	3.750	.500	.406	2.125	1.125	.719	1.375	7/16-20	10	17,508	.160	
RMX7T	RMXL7T	.4375	.562	.437	2.438	1.312	.812	1.500	1/2-20	12	23,452	.249	
RMX8T	RMXL8T	5.000	.625	.500	2.625	1.500	.937	1.625	5/8-18	10	31,390	.382	
RMX10T	RMXL10T	6.250	.750	.562	2.875	1.750	1.125	1.750	3/4-16	13	40,572	.602	

PART NO.		DIMENSIONS IN MILLIMETERS										Radial Static Load Cap. Kilograms	Approx. Brg. Wt. Grams
Right Hand	Left Hand	B + .0281 - .0127	W + .000 - .127	H ± .127	A ± .381	D ± .254	Ball Dia. Ref.	C + 1.574 - .787	Thread UNF-3A	a° Mounting Angle			
RMX3T	RMXL3T	4.83	7.92	6.35	39.67	19.05	11.10	25.40	1/4-28	10	2,386	20	
RMX4T	RMXL4T	6.35	9.53	7.14	47.63	22.23	12.70	31.75	5/16-24	13	3,834	33	
RMX5T	RMXL5T	7.94	11.10	8.74	49.23	25.40	15.88	31.75	3/8-24	12	5,887	51	
RMX6T	RMXL6T	9.53	12.70	10.31	53.98	28.58	18.26	34.93	7/16-20	10	7,942	73	
RMX7T	RMXL7T	11.11	14.27	11.10	61.93	33.32	20.62	38.10	1/2-20	12	10,638	113	
RMX8T	RMXL8T	12.70	15.88	12.70	66.68	38.10	23.80	41.28	5/8-18	10	14,239	173	
RMX10T	RMXL10T	15.88	19.05	14.27	73.03	44.45	28.58	44.45	3/4-16	13	18,403	273	

MATERIALS

BALL	RACE	LINER	BODY
S2100 STEEL R/C 58 MIN. HARD CHROME PLATED	STEEL ALLOY HEAT TREATED ZINC PLATED. CHROMATE TREATED	TEFLON® FABRIC PERMANENTLY BONDED TO RACE I.D.	STEEL ALLOY HEAT TREATED ZINC PLATED. CHROMATE TREATED